


## FLNG Series

Marine LED Floodlight 50Watt 8.000Lumens

LED flood lights applicable for decks and technical in- and outdoor applications.



### Dimensions

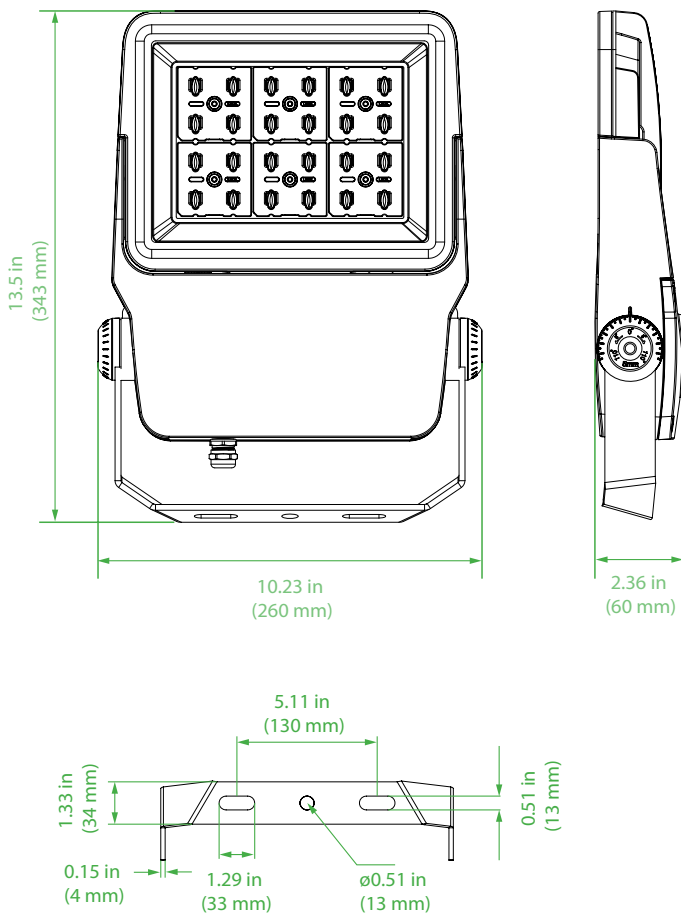

### Technical Information

<b>Material:</b>	Powder coated anodized seawater resistant aluminium
<b>Finish:</b>	White
<b>Hardware:</b>	Marine grade A4 316 stainless steel
<b>Lens:</b>	90° standard, 30°- and 60° optional
<b>IP Rating:</b>	IP67
<b>Light Source:</b>	50Watt 160Lumens per Watt Natural White 3900K CRI > 85
<b>Power Source:</b>	90-305Vac 50-60Hz (10-30Vdc optional) Meanwell HLG-60H-48B Dimmable driver (0-10Vdc – PWM – resistance) Overload, over-voltage, over-temperature and short circuit protection. Potted driver
<b>Ambient Temperature:</b>	Operating Temperature -40°C ~ +55°C
<b>Cable Entry:</b>	1 x M20 Cable Gland Nickel plated brass
<b>Mounting:</b>	Adjustable A4 316 Stainless Steel bracket 0.15 in (4 mm) thickness
<b>Fixture weight:</b>	7.49 lbs (3,4 kg)

### Compliances

In compliance with rules of maritime classification societies, additional VDE and IEC 60092-306.  
(Equipment luminaires and lighting accessories for use on vessels)